

## Copper Pre-Terminated Trunk Assemblies

High performance copper Pre-Terminated trunk assemblies are an ideal solution for premise and Data Center applications. They are manufactured using premium connectors and pre-engineered LSZH cable lengths so that they meet the customers' requirements. They are 100% factory tested to ensure the best possible performance. They come in 6 or 12 cable bundles.

Using our copper pre-terminated solution reduces cable management and provides easy racking. It allows rapid deployment, as it saves installation and configuration time while the factory quality control guarantees the product to the highest quality and performance standards.

---

## Features

- 6 or 12 cable bundles
- LSZH cable jacket
- Bespoke Labelling
- 100% Factory tested
- Provide quick and easy installation
- Supplied with hard or soft copy test results
- Available in Cat5e/Cat6/Cat6a
- Screened or unshielded cable option
- 50µ gold plated RJ45 connector

---

## Applications

- Data centers
- Premises applications


## Standards Compliance

- ISO/IEC 11801:2002/Amd.2:2010
- ANSI/TIA/EIA-568-C.2
- EN 50173
- IEC 61156-5
- EN 50288-3-1
- (EC) No. 1907/2006
- ISO/IEC 60603-7
- IEC 60512-12-5
- RoHS
- REACH / SVHC compliant regulation


## Ordering Information

	Category		Cable Type		End A		End B		No. of Cables		Length	
OPTC	5E	Cat5E	1	UTP	J	Jack	J	Jack	06	6	10	10m
	6	Cat6	2	FTP	P	Plug	P	Plug	12	12	12	12m
	6A	Cat 6A					X	Open			14	14m
											16	16m
											18	18m
											20	20m


## Technical Drawing

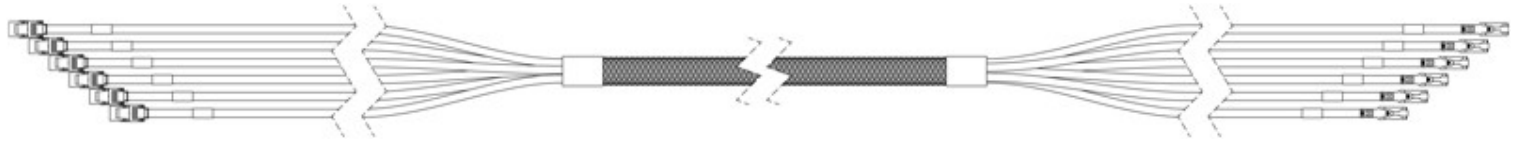


Jack to Plug Pre-terminated Diagram

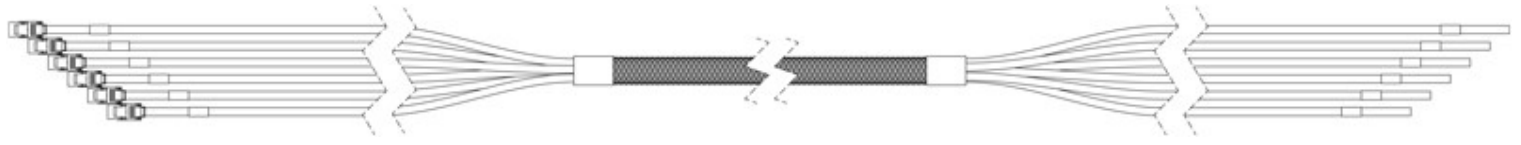


Jack to Open End Pre-terminated Diagram

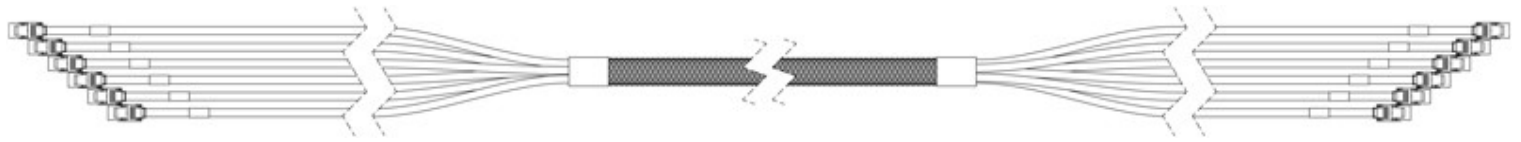


Jack to Jack Pre-terminated Diagram

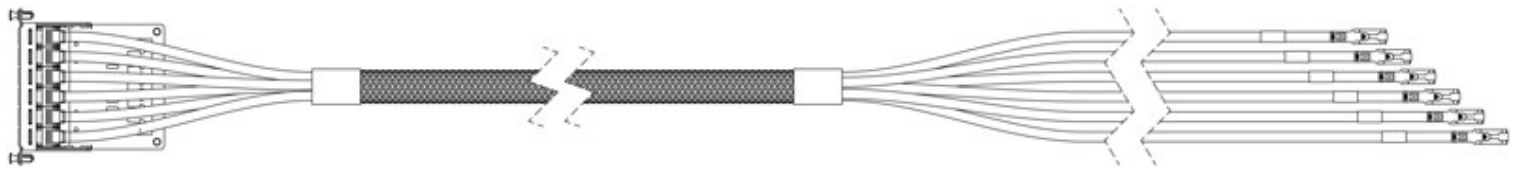

LGX to Plug Pre-terminated Diagram

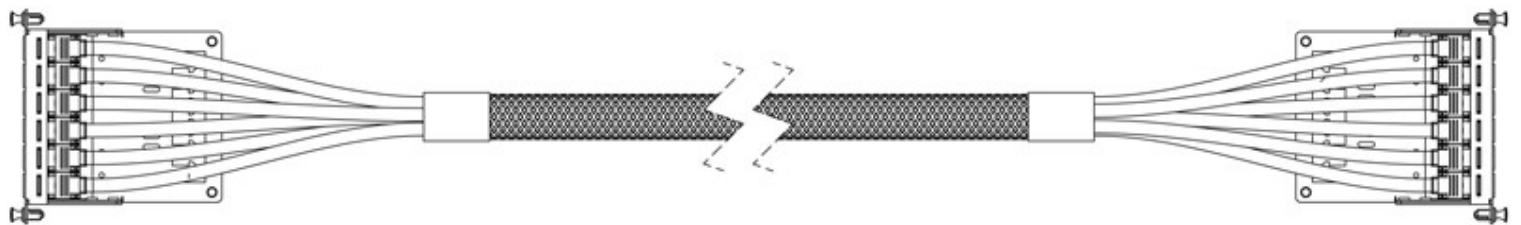

LGX to LGX Pre-terminated Diagram

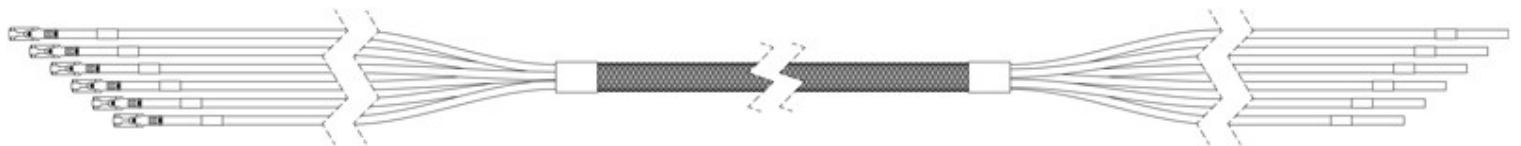

Plug to Open End Pre-terminated Diagram