

200G QSFP56 Active Optical Cables

Optronics 200G QSFP56 Active Optical Cable assembly is an Eight-Channel, Pluggable, Parallel, Fiber-Optic QSFP Double Density for 2x200 Gigabit Ethernet Applications. This AOC is a high performance module for short-range multi-lane data communication and interconnect applications. It integrates eight data lanes in each direction with 8x26.5625GBd. Each lane can operate at 53.125Gbps up to 70 m using OM3 fiber or 100 m using OM4 fiber with FEC. These modules are designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 76 contact edge type connector.. It has low power scattering and a rigid force tab for enhanced high-density installments. It is fully tested for compatibility with intended equipment.

Features

- Hot-pluggable QSFP-DD form factor
- 8 channels full-duplex transceiver modules
- Transmission data rate up to 53Gbps per channel
- 8x53Gbps PAM4 transmitter and PAM4 receiver
- 8 channels 850nm VCSEL array
- 8 channels PIN photo detector array
- Internal CDR circuits on both receiver and transmitter channels
- Power consumption < 10W per end
- Built-in digital diagnostic functions
- Operating case temperature 0°C to 70°C
- RoHS compliant

Applications

- 400G 100m Ethernet
- Data Centres
- InfiniBand transmission
- High performance computing (HPC) application

Specifications

Absolute Maximum Ratings

ELEMENT	Unit	Symbol	Min.	Max.
Power Supply Voltage	V	VCC	-0.5	+3.6
Storage Temperature	°C	Tc	-40	+85
Relative Humidity	%	RH	15	85

Notes:

1. Non-condensing

Recommended Operating Conditions

ELEMENT	VALUE	SYMBOL	MIN	TYPICAL	MAX
Power Supply Voltage	V	V _{CC}	3.15	3.30	3.45
Supply current	mA	I _{CC}	-	-	2898
Operating Case Temperature	°C	T _{Ca}	0	-	70


Electrical Characteristics

ELEMENT	VALUE	SYMBOL	MIN	TYPICAL	MAX
Signaling rate per lane	GBd	-	-	26.5625± 100 ppm	-
Differential Input Voltage Amplitude	mV	V _{in}	900	-	-
Differential Output Voltage Amplitude	mV	V _{out}	-	-	900
Differential termination mismatch	%	-	-	-	10
Skew	ps	-	-	-	300
Bit Error Rate	-	BER	-	-	2.4E-4
Input Logic Level High	V	V _{IH}	2.0	-	VCC
Input Logic Level Low	V	V _{IL}	0	-	0.8
Output Logic Level High	V	V _{OH}	VCC-0.5	-	VCC
Output Logic Level Low	V	V _{OL}	0	-	0.4


Notes:

1. Differential input voltage amplitude is measured between TxnP and TxnN.
2. Differential output voltage amplitude is measured between RxnP and RxnN.

Pin Descriptions

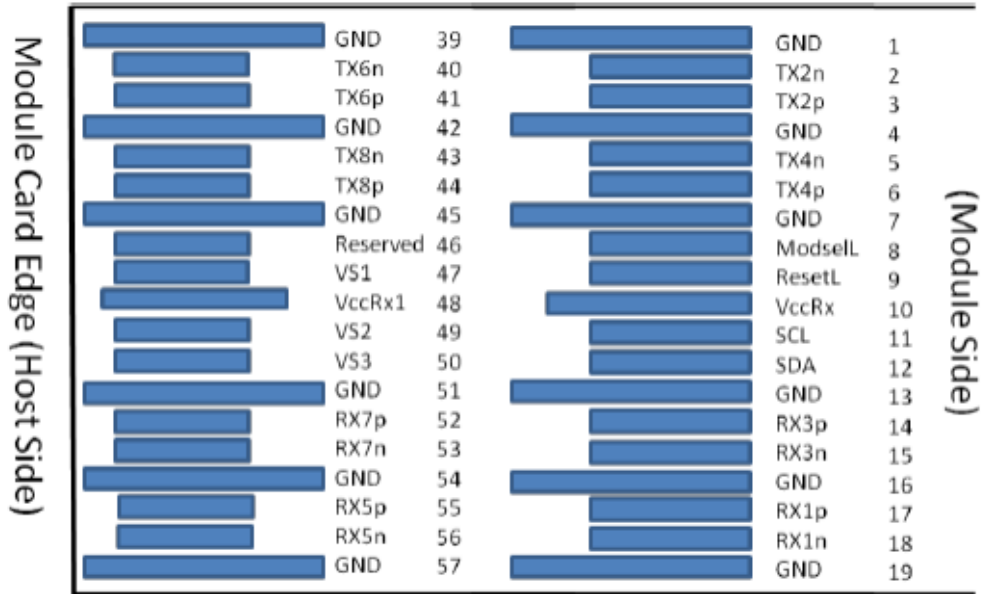

Bottom side viewed from bottom

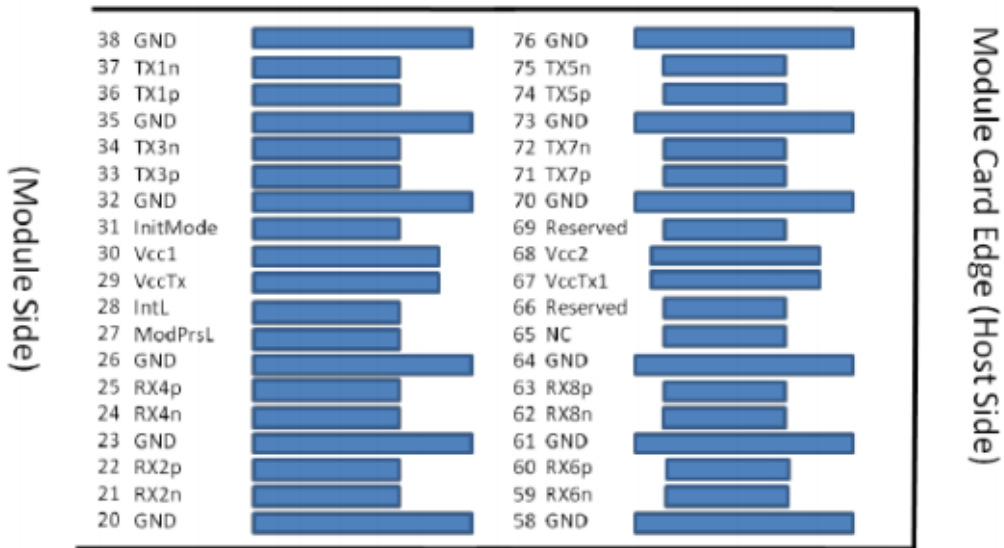

Top side viewed from top

Figure 1 – QSFP-DD -compliant 76-pin connector (per QSFP-DD MSA)

Pin Definitions

Pin	Symbol	Name/Description
1	GND	Module Ground
2	Tx2-	Transmitter inverted data input
3	Tx2+	Transmitter non-inverted data input
4	GND	Module Ground
5	Tx4-	Transmitter inverted data input
6	Tx4+	Transmitter non-inverted data input
7	GND	Module Ground
8	MODSEIL	Module Select
9	ResetL	Module Reset
10	VCCRx	+3.3V Receiver Power Supply
11	SCL	2-wire Serial interface clock
12	sda	2-wire Serial interface data
13	GND	Module Ground
14	RX3+	Receiver non-inverted data output
15	RX3-	Receiver inverted data output
16	GND	Module Ground
17	RX1+	Receiver non-inverted data output
18	RX1-	Receiver inverted data output
19	GND	Module Ground
20	GND	Module Ground
21	RX2-	Receiver inverted data output
22	RX2+	Receiver inverted data output
23	GND	Module Ground
24	RX4-	Receiver inverted data output
25	RX4+	Receiver non-inverted data output
26	GND	Module Ground
27	ModPrsL	Module Present, internal pulled down to GND
28	IntL	Interrupt output, should be pulled up on host board
29	VCCTx	+3.3V Transmitter Power Supply
30	VCC1	+3.3V Power Supply
31	InitMode	Initialization mode; In legacy QSFP applications, the InitMode pad is called LPMODE
32	GND	Module Ground
33	Tx3+	Transmitter non-inverted data input
34	Tx3-	Transmitter inverted data input
35	GND	Module Ground
36	Tx1+	Transmitter non-inverted data input
37	Tx1-	Transmitter inverted data input
38	GND	Module Ground
39	GND	Module Ground
40	Tx6-	Transmitter inverted data input
41	Tx6+	Transmitter non-inverted data input
42	GND	Module Ground
43	Tx8-	Transmitter inverted data input

44	Tx8+	Transmitter non-inverted data input
45	GND	Module Ground
46	Reserved	For future use
47	VS1	Module Vender Specific 1
48	VCCRx1	+3.3V Power Supply
49	VS2	Module Vender Specific 2
50	VS3	Module Vender Specific 3
51	GND	Module Ground
52	RX7+	Receiver non-inverted data output
53	RX7-	Receiver inverted data output
54	GND	Module Ground
55	RX5+	Receiver non-inverted data output
56	RX5-	Receiver inverted data output
57	GND	Module Ground
58	GND	Module Ground
59	RX6-	Receiver inverted data output
60	RX6+	Receiver inverted data output
61	GND	Module Ground
62	RX8-	Receiver inverted data output
63	RX8+	Receiver non-inverted data output
64	GND	Module Ground
65	NC	NO Connect
66	Reserved	For future use
67	VCCTx1	+3.3V Power Supply
68	VCC2	+3.3V Power Supply
69	Reserved	For future use
70	GND	Module Ground
71	Tx7+	Transmitter non-inverted data input
72	Tx7-	Transmitter inverted data input
73	GND	Module Ground
74	Tx5+	Transmitter non-inverted data input
75	Tx5-	Transmitter inverted data input
76	GND	Module Ground

Ordering Information

DESCRIPTION
PART NUMBER

Optronics 400G QSFP+ Active Optical Cable

OQSFP-AOC-400400-XXX

**where XXX is 1-70 cable length in metres on OM3 MMF
1-100 cable length in metres on OM4 MMF*